

EPIQ Industrial Absorber



APPLICATIONS

Ceilings and wall panels for industrial settings.

USAGE

Manufacturing
Industrial

Distribution
Centers


PANEL SPECIFICATIONS

Thickness	1/2" 1-1/8"
NRC	0.60 1.00
Size	48"x96"

STANDARD COLOR



Colors below are available upon request with minimum order of 750 sheets (24,000 SF)

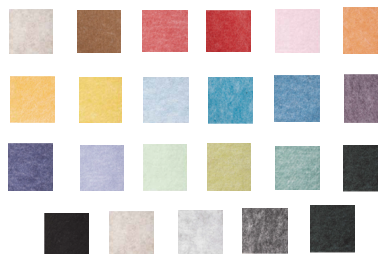

- UL Certified for no VOC's
- LEED & LBC Product Declarations
- Absorbing Sound Beautifully For A Lifetime

Declare



TVOC UL
0.5mg/m3
or less

STATEMENT OF HAZARDOUS NATURE

Classified as Non-hazardous according to OSHA29C-FR1910.1200

FIRST AID INFORMATION

SWALLOWED: Give a glass of water & seek medical advice.

SKIN: Brush off. EYE: If the product comes into contact with the eye, immediately hold the eye open and wash with fresh water. If pain persists seek medical advice.

FIRE FIGHTING MEASURES

Alert fire department of location and nature of fire. Extinguish with water, fog, foam, or dry chemical. Product includes carbon monoxide. Material will shrink away from flame and may drip.

PRODUCT DESCRIPTION

Non-woven, thermally bonded 100% polyester fiber panel. 65% recycled content, 100% recyclable. Class A Fire Rating per ASTM E84. CAS # 68604-67-1. Noise Reduction Coefficient (NRC) 1.00 per ASTM C423-09a.

HANDLING AND STORAGE

Do not compress or bend product or package. Segregate from strong oxidizers. Keep covered, clean and dry.

CLEANING & MAINTENANCE

Can be cleaned and maintained as follows: brush off, blow off with compressed air, clean by using a dry cleaning sponge, damp white cloth or similar. Heavy soiling or stains may require a cleaner similar to Resolve Carpet Cleaner or Spot Shot which should be used as directly. Heavily damaged panels should be replaced.

LIMITED ONE-YEAR WARRANTY

F-SORB® has a limited One-Year Warranty. This warranty covers defects in the structural integrity of the panels. This warranty does not cover damage caused by fire, water, accident, or by any form of abuse.

1 (844) 313-7672
www.fsorb.com

